


# Eco Solvent Printer

1.6M, 1.8M EPSON XP600/DX5/I3200 HEADS



**PRECISIONCORE**  
PRINTHEAD  
powered by EPSON

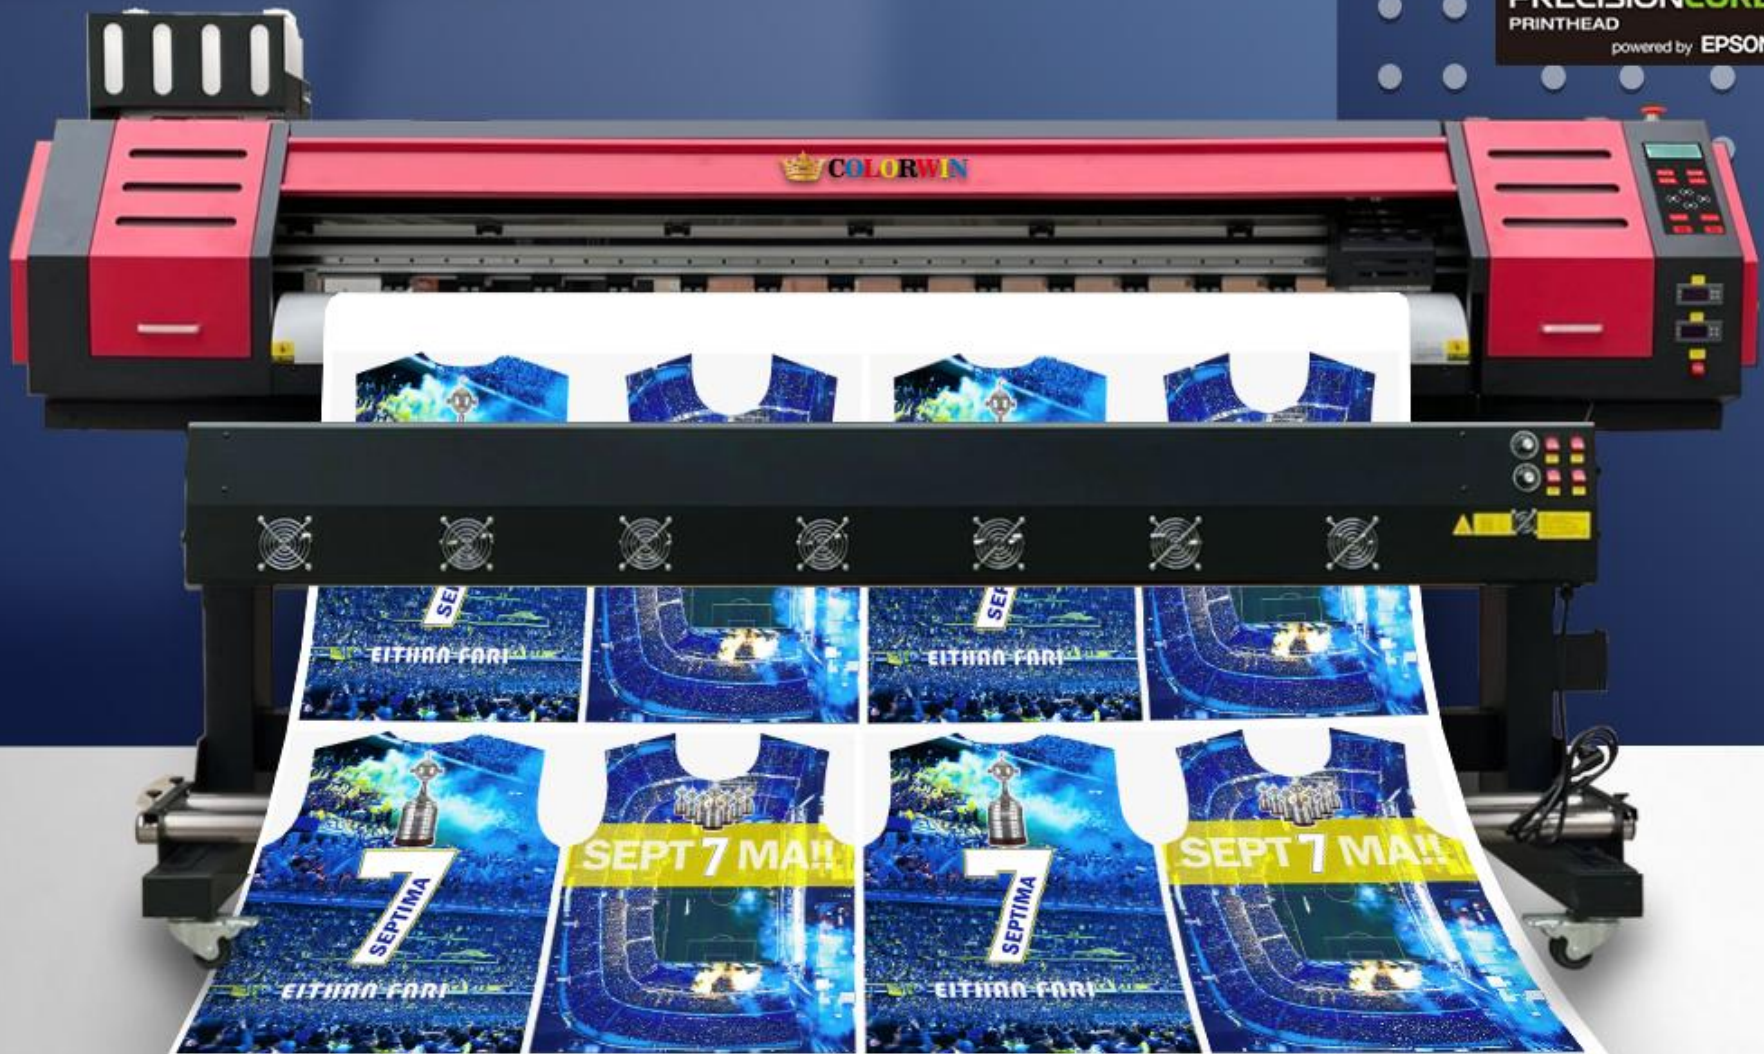

# Eco Solvent Printer | W161&W1812

## ● Features




### Different Printhead Available

Epson DX5, XP600, i3200 printheads available. Meet the requirement of different clients.



### Wide Pinch Roller

Wide pinch roller keeps smooth movement of the media. And it has proper pressure to ensure accurate media step while not make any footprint of the pinch roller.



### IGUS Drag Chain from Germany

IGUS drag chain itself is a guarantee of quality, takes the printer stability to a new level. Effectively protect ink tube and cables.



### Smooth winding

Double steel pipe constant force high precision cloth feeding system, to ensure the continuous smooth transmission of paper.



### Large capacity ink supply

Intelligent ink supply system, constant liquid level, to ensure high speed and high output of printing ink, capacity up to 2000ml.

★ New look has heavier, larger structure, and wider printing platform

★ Big Functional Control Panel. Adopts the latest program Intelligent Error Auto-Detection boards, it can guide user to find solution very quickly

★ IGUS Drag Chain from Germany. A guarantee of quality, takes the printer stability to a new level. Effectively protect ink tube and cables

★ LED lamp strip is equipped, users could check out the print result more easily

★ Optional infrared heater for drying prints quickly



## ● Specification

Model NO.	W161	W1612	W181	W1812	
Printhead	1/2 Epson XP600/DX5/I3200 heads				
Resolution(dpi)	1440dpi	2880dpi	1440dpi	2880dpi	
Media	Width	1.6m	1.8m		
	Types	Flex Banner, Vinyl, One Way Vision, Banner Cloth, Window Film, Mesh...			
Speed	4 pass	20 sqm/h	25 sqm/h	20 sqm/h	30 sqm/h
	6 pass	15 sqm/h	19 sqm/h	15 sqm/h	22sqm/h
	8 pass	10 sqm/h	14 sqm/h	10 sqm/h	15sqm/h
Ink Color	CMYK				
Ink Type	Eco Solvent Ink				
Ink Droplet	1.5-21pl Variable				
Cleaning	Automatic Cleaning, Anti-Clogging Flash Function & Capping System				
Feed & Take Up	Automatic Media Feeding (Standard) & Take Up System (Optional)				
Environment	Temperature: 20-28°C, Humidity: 40-60%				
Rip Software	Maintop (Standard) / PhotoPrint (Optional)				
Interface	USB3.0				
Power	Machine 50/60HZ, 110/220V, 1200W				
Packing Size & Weight	2700x750x750mm / 160 KG		2950x750x750mm / 190KG		

Specifications are subject to change without notice.